



Par-ky[®]
friendly floors

With the latest trend!

twist⁺

Contents



Reasons for
choosing Par-ky... 4

A FLOOR TO LOVE !

With Par-ky you are choosing security! Par-ky floors are produced exclusively in our facilities in Belgium by a team of motivated employees for **whom quality is paramount**. We stand behind this commitment to quality with our **15 year warranty**. In addition, Par-ky floors are **easy to install** and **maintain**.

Our range consists of **5 collections**, so we can offer the right floor for every budget and taste. Newest to the range the **Twist collection** is the latest innovation from Par-ky. Par-ky Twist is a pattern floor that allows you the freedom to choose not only the design but also the arrangement. Par-ky Twist has also been designed without sacrificing ease of installation and maintenance. In addition to Twist we have **4 traditional floorboard collections**: Par-ky Pro, Lounge, Sound and Deluxe. Thanks to our unique production process, Par-ky can not only be offered in traditional varieties of wood such as oak or walnut but also in a wide range of exotic species



Our
5 collections 6

twist+

deluxe+

sound+




Inspiration 10

Also visit
our website
www.par-ky.com



Installation 58

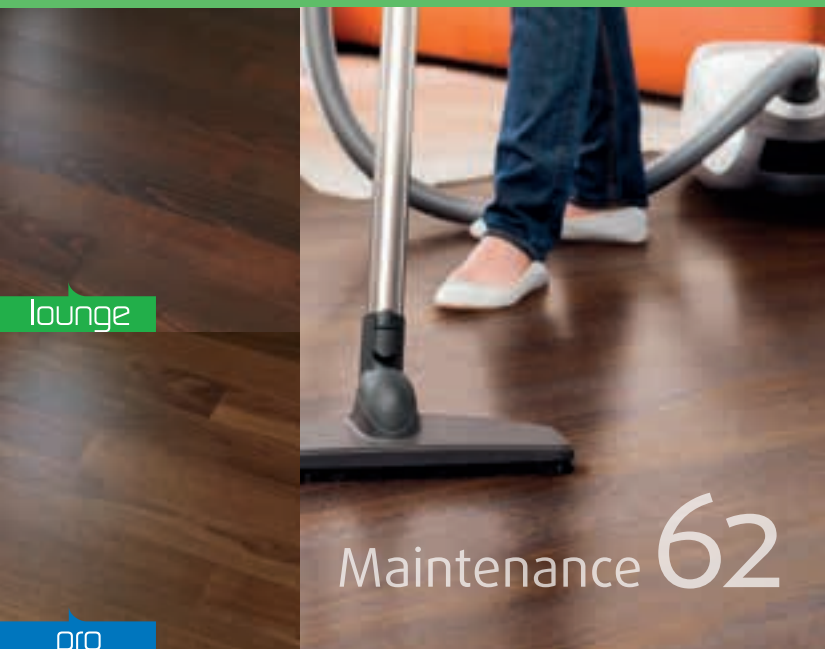

lounge

pro

Maintenance 62

Technical
Specifications 66

Reasons for choosing Par-ky



REAL WOOD

Every Par-ky floorboard has a top layer of **real wood**. That's why our floors look like solid parquet. Just like in nature, **no two Par-ky floorboards** are the **same**. In addition, the wood also feels pleasantly **warm** to the touch.



A SUSTAINABLE CHOICE

Par-ky loves **wood**, so we are very careful how we use this precious, natural resource. We optimise the use of this raw material by only cutting a **thin top layer**. In addition, all our wood comes from **sustainable forests**.

Nearly one third of the energy that we need for the production of our floors is generated by our own **solar panels**. Last year we also installed **2 wind turbines** that provide us with extra sustainable energy. We also reduce our waste by collecting sawdust and wood chips which can be used as **heating fuel** during the cold months. Less waste, less fuel, fewer emissions. And there's more good news: we are aiming to be able to produce on a completely **CO₂-neutral** basis by 2017!



EASY TO INSTALL

With Par-ky you have all the practical benefits of laminate without actually using laminate in your home. Our floors are **easy to maintain** and come with the handy **Uniclic® system** for **fast, easy installation**.



STRONGER THAN SOLID PARQUET

A Par-ky floor is not only strong but also **extremely impact-resistant**, thanks to its **ultra-strong HDF core** (High-Density Fiberboard). In addition, all Par-ky is finished with no fewer than **eight thick layers** of a factory applied - UV cured lacquer. This makes our floors more resistant to impacts than solid or engineered parquet with a thicker top layer.



HYGIENIC

All bevels are stained, lacquered and protected from humidity thanks to our **Aqua Sealing Complete** system.

The V-groove is also given an "Ultrafresh" antibacterial protective coating. This ensures that bacteria cannot take root there. So your floor remains not only clean, but also hygienic.

OUR VENEER FLOORING GUARANTEES A HEALTHY AIR QUALITY

It is a fact: the quality of the air is better in rooms with a Par-ky floor. How is this possible? We use **water-based stains, glues without VOCs** (Volatile Organic Compounds) and **lacquers without solvents** to finish our products. The HDF (High-Density Fibreboard) used for the core of our boards is of the highest grade. This allows Par-ky to earn an **A emissions grade in Europe (Deluxe collection earned an A+)** and pass one of the most stringent indoor air quality certification programs in the world with the availability of a **FloorScore® certified** version of Par-ky. (*Par-ky will only be FloorScore certified when requested.)




5 collections for your wildest dreams

PATTERN FLOOR




Calculate the area
www.par-ky.com/twistcalculator




Length 868 mm (34 inch)
Width 124 mm (4 7/8 inch)
Thickness 12 mm (15/32 inch)


Herringbone



Double herringbone



Square



4 BOARD FLOORS



Length
1800 mm (71 inch)
Width
160 mm (6 19/64 inch)
Thickness
15 mm (19/32 inch)



* except Sand Ash & Sucupira



QUIET TO WALK ON

These collections have a
2 mm (5/64 inch) layer of cork.
This makes them quiet to walk on,
just like a solid wooden floor.

sound⁺

Length
1800 mm (71 inch)
Width
124 mm (4 7/8 inch)
Thickness
12 mm (15/32 inch)

lounge

Length
1203 mm (47 3/8 inch)
Width
124 mm (4 7/8 inch)
Thickness
8,3 mm (21/64 inch)

pro

Length
1203 mm (47 3/8 inch)
Width
190 mm (7 31/64 inch)
Thickness
7,2 mm (9/32 inch)

WIDE RANGE


BUDGET



Excellent alternative
to laminate.

Choose from 26 designs

T twist+ D deluxe+ S sound+ L lounge P pro

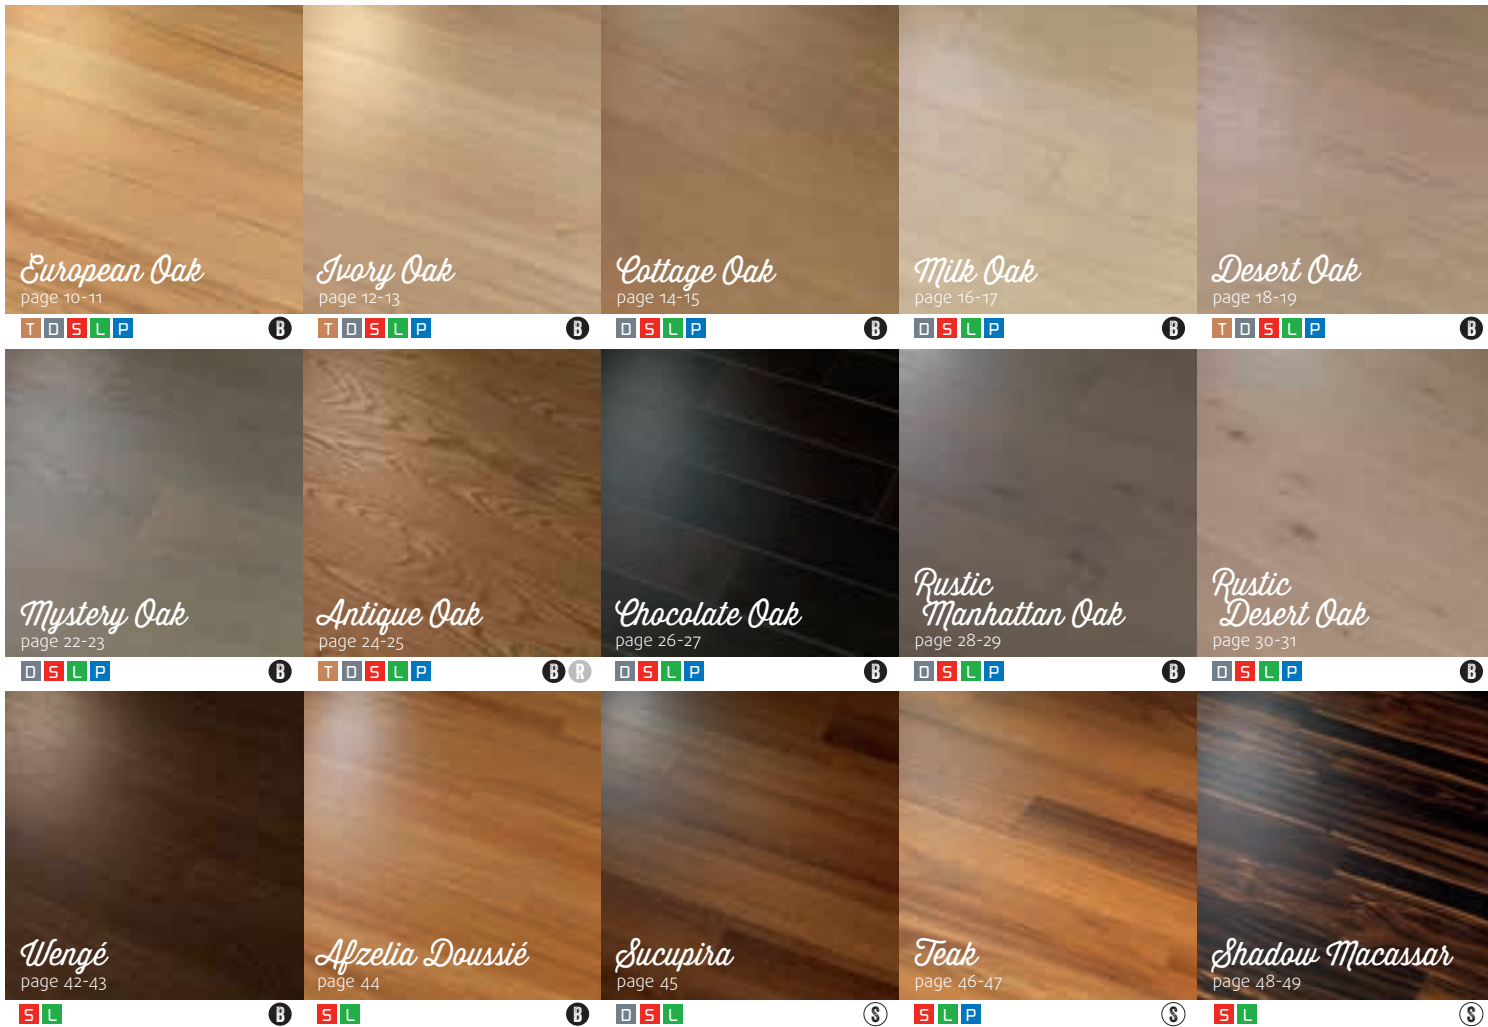

B

WHAT IS BRUSHED ?

Our brushed finish accentuates the **natural structure** of the wood. These floors are also given a **mat** varnish, which preserves **the wood's natural look**. This finish is much tougher than an oil finish, but slightly less resilient than our sealed finish (explanation is found to the right).



R

WHAT IS ROUGH CUT ?

The rough cut finish is a finish where we combine both a brushed and **bandsaw effect**. We make transverse notches in the wood, **giving it a rustic, aged look**. Thanks to a patented process, Par-ky guarantees that **no 2 floorboards are ever the same**. We therefore continue to stand out from the many imitations.




S

WHAT IS SEALED ?

With a sealed finish, we fill the wood pores with a varnish. This creates an **extremely tough protective layer** on the natural wood that makes your floor **resistant to dampness and dirt**. For kitchen uses, we recommend only choosing this finish.



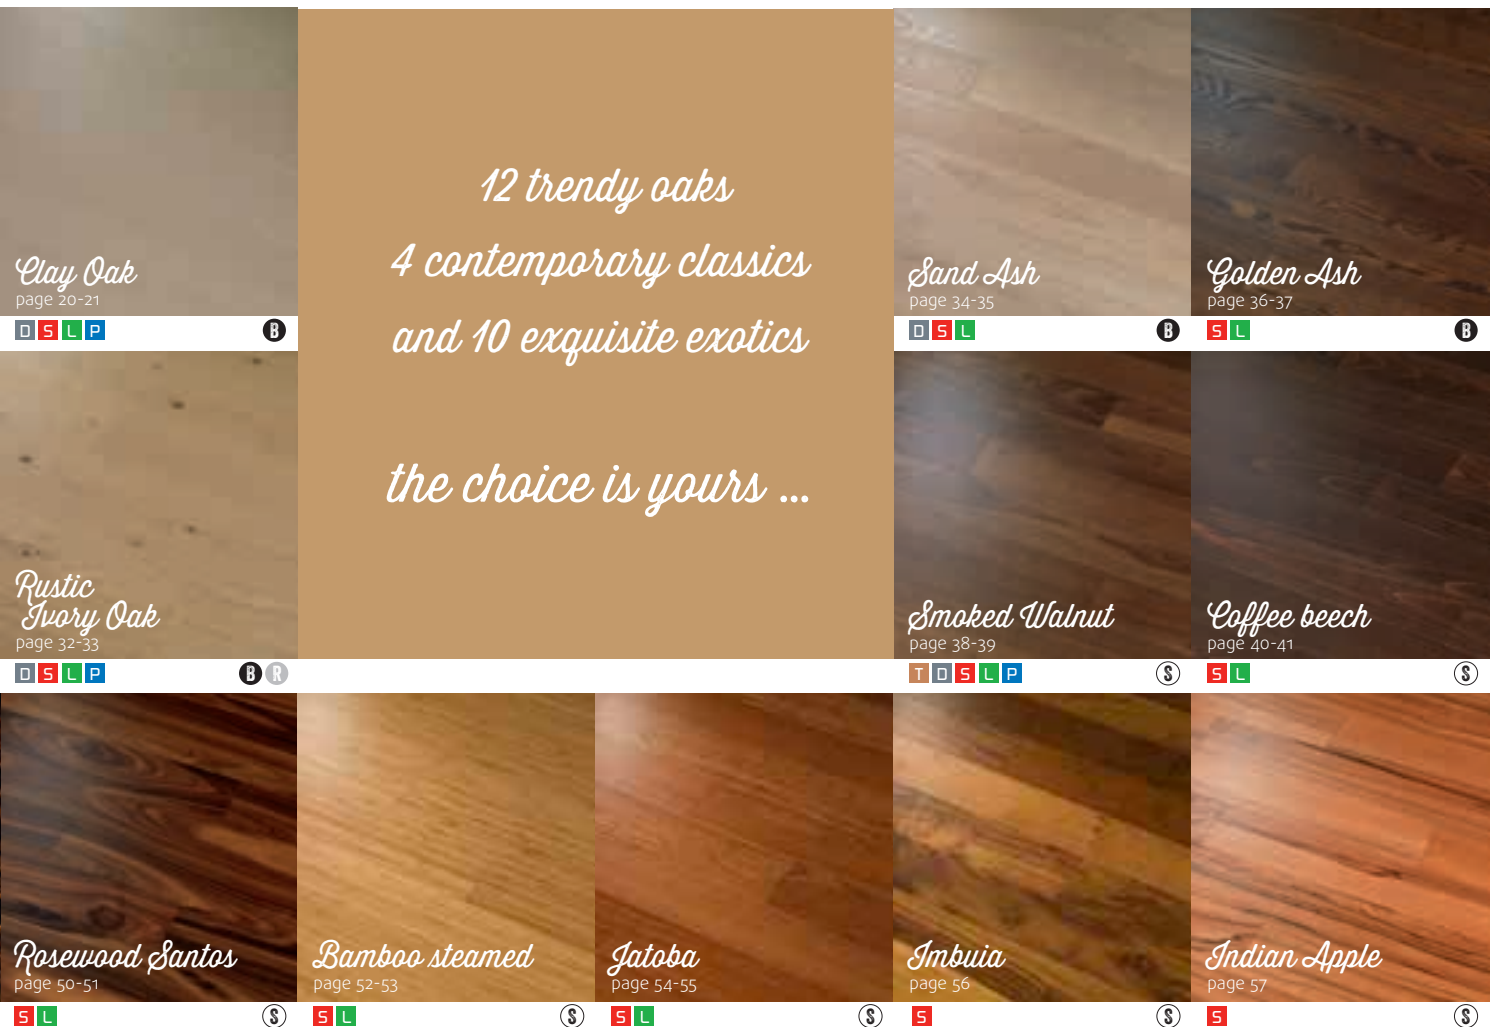

WHAT ARE BEVELS ?

Bevels are the edge finishes on each separate floorboard. At Par-ky we always use a V-shaped bevel, and distinguish between 3 different types. First we have a maxi bevel of 1.5 mm (1/16 inch). This bevel is used to emphasise the width of the floorboard.

Second is the 0.5 mm (1/64 inch) mini bevel which is used as standard to ensure that the individual floorboard is more easily visible. Third is a subtle micro bevel of 0.1 mm (1/256 inch), which is only used on the top joints of the floorboards. The table shows the various bevels for each collection.

V-BEVELS

		Maxi bevel 1.5 mm (1/16 inch)	Mini bevel 0.5 mm (1/64 inch)	Micro bevel 0.1 mm (1/256 inch)
twist ⁺	brushed	-	4	-
	sealed	-	4	-
deluxe ⁺	brushed	2	2	-
	sealed	2	2	-
sound ⁺	brushed	-	4	-
	sealed	-	4	-
lounge	brushed	-	4	-
	sealed	-	2	-
pro	brushed	-	4	-
	sealed	-	2	2



INSPIRATION : 12 TRENDY OAKS

Oak looks great in every interior and symbolises power and strength. Oak wood has a timeless style and is very relaxing. It's ideal for creating a cosy atmosphere in your home. That's why this wood specie is excellent for parquet. In addition, the Par-ky collection comes in the latest trends and colours. This range of floors is very attractive. Trendy oaks feel at home in every interior.

ref 101/ *European Oak*

Available in twist+ deluxe+ sound+ lounge pro



Van Staeyen Interieur Architecten







ref 102/ *Ivory Oak*

Available in twist* deluxe* sound* lounge pro



ref 119/ *Cottage Oak*

Available in deluxe+ sound+ lounge pro







ref 103/ *Milk Oak*

Available in deluxe+ sound+ lounge pro

Our macro bevels emphasise the width of our DELUXE+ premium collection. On the short side we use an elegant mini bevel. This long, wide floorboard is the showpiece of the Par-ky range.



ref 104/ *Desert Oak*

Available in twist* deluxe* sound* lounge pro





ref 120 / *Clay Oak*

Available in deluxe* sound* lounge pro



Par-ky has developed aluminium profiles for each oak reference. These profiles are extremely strong and therefore perfectly suited to intensive use. There are also wooden profiles for normal domestic use. More info on page 61.

Architect: Reginald Schellen






ref 105/ *Mystery Oak*

Available in deluxe* sound* lounge pro



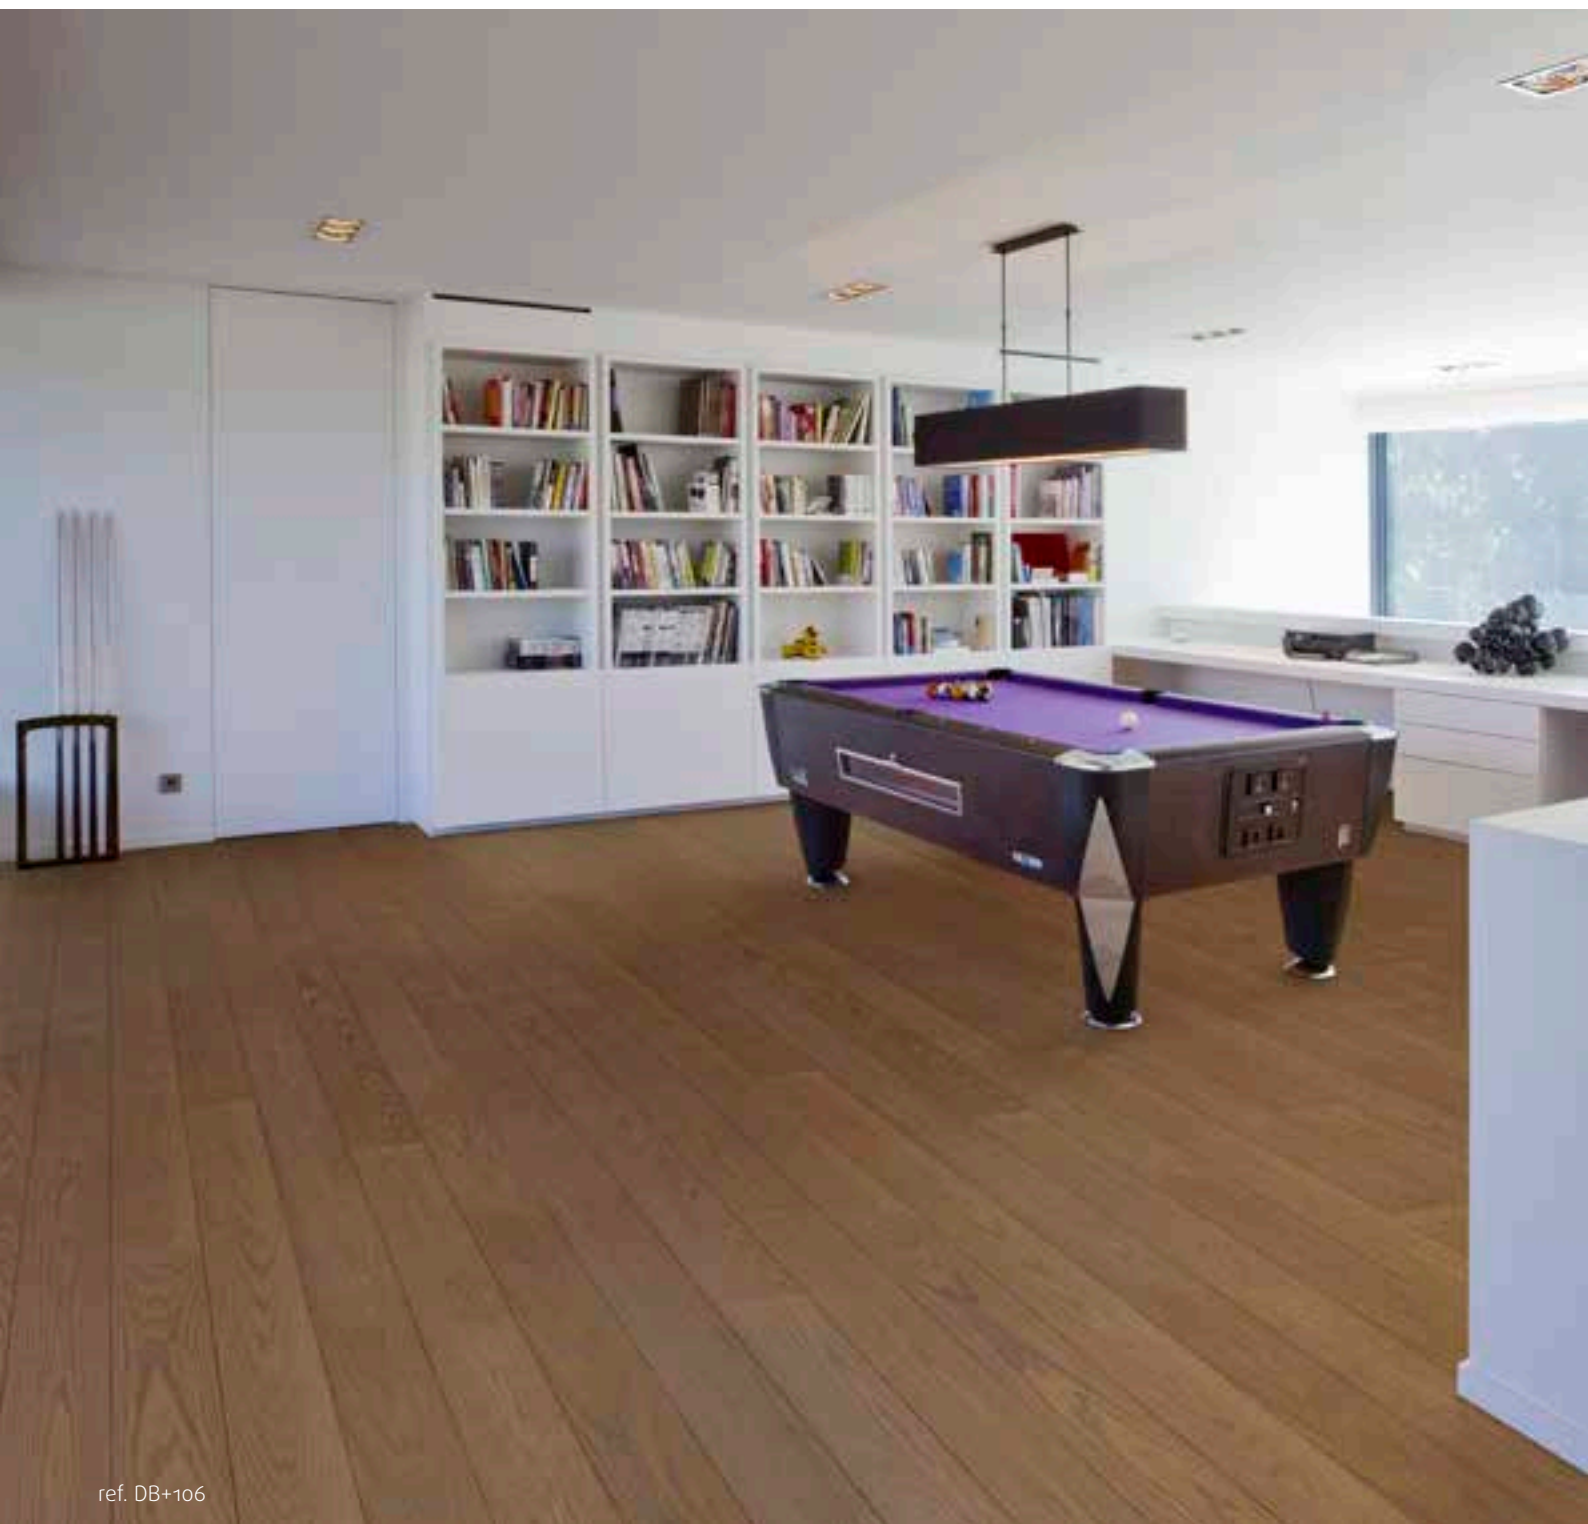

ref. DB+106

ref 106 / *Antique Oak*

Available in twist* deluxe* sound* lounge pro






ref 108/Chocolate Oak

Available in deluxe* sound* lounge pro

Par-ky is finished with a thin layer of veneer. This wooden top layer exudes class, exhibits unique wood structures and radiates a natural warmth.

Add a touch of cosiness in your home with a Par-ky floor!

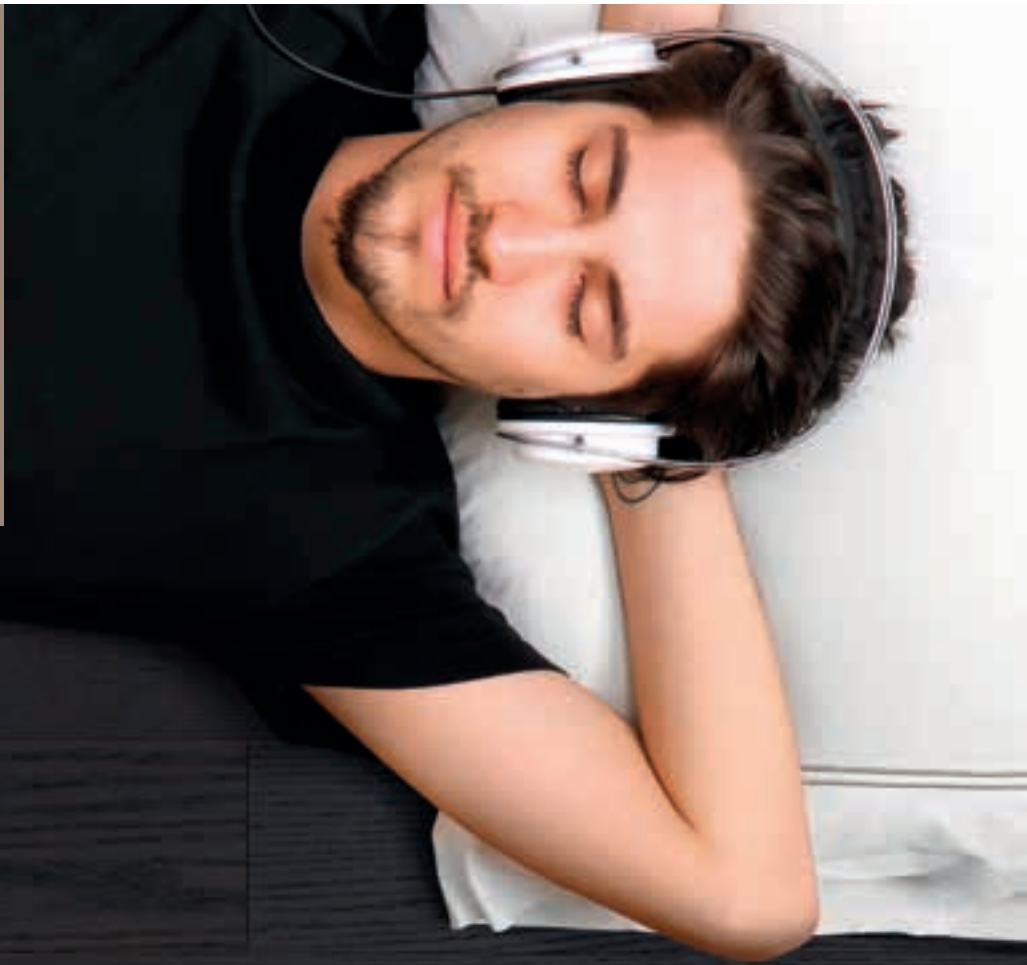



*ref 109/ Rustic Manhattan Oak*Available in deluxe⁺ sound⁺ lounge pro

All our collections marked with the + sign have an integrated cork underlay. This cork underlay allows Par-ky to produce sound qualities comparable to that of fully glued or nailed down floors. Cork also offers an ecological alternative for the many synthetic underlays found in the market.



ref 116/ *Rustic Desert Oak*

Available in deluxe+ sound+ lounge pro



Par-ky provides the accessories needed for a perfect finish. For example, we have designed a highly practical 3-in-1 skirting in all the designs in our range. The height of the veneer skirting can be varied according to taste or application. More info on page 60.



ref 110 / *Rustic Ivory Oak*

Available in deluxe* sound* lounge pro







INSPIRATION : 4 CONTEMPORARY CLASSICS

These contemporary classic floors radiate tradition. The wood species we have selected here have made generations happy thanks to their warm look and feel. They are contemporary but also timeless and incredibly beautiful. You can rest assured you'll still love your floor tomorrow.

ref 201/ *Sand Ash*

Available in deluxe+ sound+ lounge







ref 202/ *Golden Ash*

Available in **sound+** **lounge**

A Par-ky floor is easy to maintain. We recommend first vacuuming the floor and then cleaning it with the specially developed Par-ky Cleaner. The 8 coats of varnish, combined with the aqua seal technology in the bevels, keep the floor free from dampness. This makes maintenance child's play.



ref 203/ *Smoked Walnut*

Available in twist+ deluxe+ sound+ lounge pro







ref 204/ *Coffee Beech*

Available in **sound+** **lounge**





INSPIRATION : 10 EXQUISITE EXOTICS

If you're looking for a floor in an exclusive wood specie which is affordable, we have the ideal solution for you here. An African highlight in ebony or a Tuscan ambiance from olive tree wood: Par-ky can do it all. You can create an exotic holiday feeling at home without spending a fortune. Exquisite exotics create truly unique floors.

ref 301/ *Wengé*

Available in **sound+** **lounge**





ref 302 / *Afzelia Doussié*

Available in **sound+** **lounge**





ref. LS303

ref 303/ *Sucupira*

Available in deluxe* sound* lounge

ref 304 / *Teak*

Available in sound* lounge pro






Small scratches can easily be repaired with the Par-ky repair pens. Pens have been developed for every reference, and contain both dye and varnish. After repairing with dye, it is important to use the varnish so that the crack is sealed. This prevents dirt from getting into the scratch, and the floor retains its original beauty for even longer. Find out more on page 65.





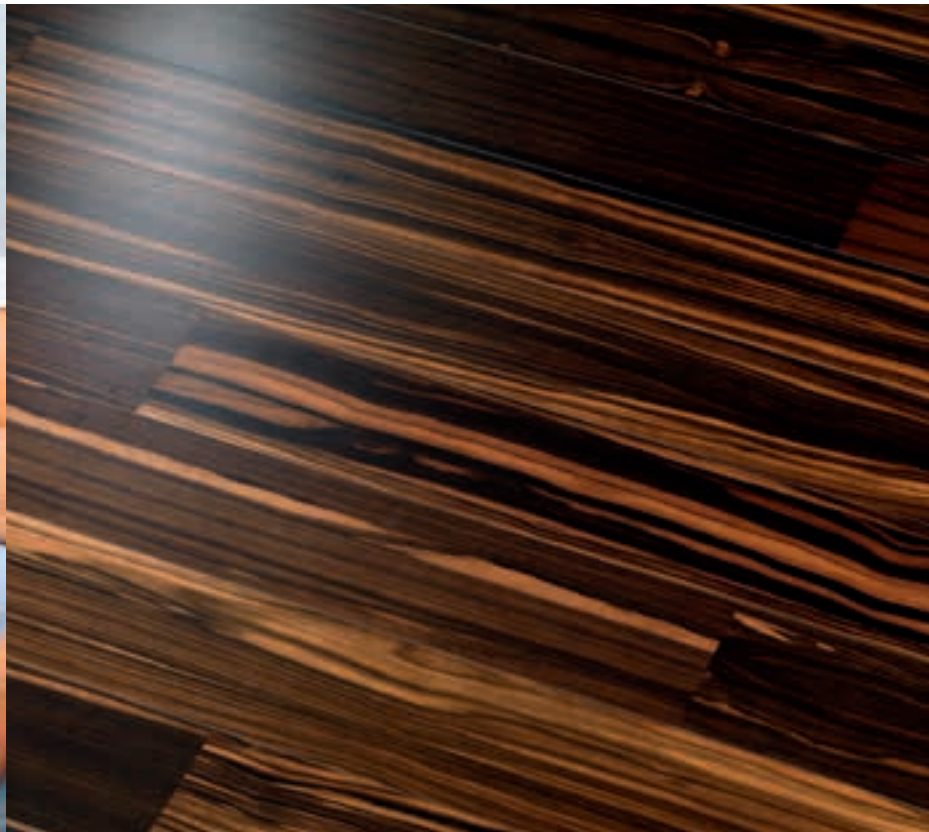

ref. LS305

ref 305 / *Shadow Macassar*

Available in **sound+** **lounge**

ref 306/ *Rosewood Santos*

Available in **sound*** **lounge**



You no longer need to buy costly solid parquet to get a floor with an exotic tinge. Because Par-ky works with a veneer top layer, we can offer you a quality floor produced with a variety of premium woods at an unprecedented value.





ref 307/ *Bamboo Steamed*

Available in sound+ lounge



ref 308/ *Jatoba*

Available in **sound+** **lounge**





ref 309 / *Imbuia*

Only available in **sound***





For intensively used floors, we recommend opting for a sealed finish. With this finish the wood pores are completely closed, making your floor even more resistant to dampness and dirt.

ref. SS+311

ref 311/ *Indian Apple*

Only available in **sound+**

*“Do it yourself” installation has
never been so easy*



Installation

Installing Par-ky is really very easy. With our installation kit you have all the tools you need to install your Par-ky floor quickly and without damaging it: spacers to create expansion joints, pull bar and tapping block.



Installation instructions
can be found on each package,
at www.par-ky.com/en/Downloads/
or by scanning the code
with your smartphone.



Which underlay should I choose ?

For use with



Use the **Par-ky damp-proof foil** (150 micron) for floors with an integrated cork layer. To prevent subfloor dampness damaging your floor, seal the edges together with Par-ky waterproof tape.

25 m²
per pack



For use with



A SOUND-INSULATING solution:

Par-ky aluminium underlay (3,6 mm - 9/64 inch) reduces reflected noise and levels minor dips in the subfloor. Always lay with the aluminium side up and seal the edges together with waterproof tape. This prevents substrate dampness damaging the floor.

15,07 m²
Roll



A STANDARD solution:

The Standard underlay (2 mm - 5/64 inch) consists of foam and plastic. The integrated plastic prevents dampness from the substrate damaging your floor. We recommend sticking the strips together with Par-ky waterproof tape.

50 m²
or 20 m²
Rolls



Waterproof tape



The floor has to be protected against rising damp. To stick our quality underlays together, we strongly recommend using the tested waterproof tape from Par-ky. Only in this way can you protect the underside of your floor against dampness.



Smart tools for a perfect finish

FITTING SKIRTINGS

1 skirting, 3 heights

The icing on the cake: once your Par-ky floor is installed, you can fit matching wood skirtings for that finishing touch. Our trendy skirtings are 8 cm ($3 \frac{1}{8}$ inch) high but they can easily be shortened to 6 cm ($2 \frac{23}{64}$ inch) or even 2.5 cm (1 inch). Use the included cutter and cut the skirtings to the desired height along the grooves. It's up to you to decide.

Skirting dimensions:
2150 x 80 x 14 mm ($85 \times 3 \frac{5}{32} \times \frac{35}{64}$ inch)



Original height 80 mm ($3 \frac{5}{32}$ inch)



Reduced to a height of 60 mm ($2 \frac{23}{64}$ inch)



Reduced to a height of 25 mm (1 inch)



PROFILES

Wooden profile (domestic use)

1 profile, 3 applications

Everyone will appreciate our 3-in-1 profile that's available in the 26 Par-ky designs.

Really handy for:

1. End profile (jointless horizontal finish)
2. Reducer profile (to bridge the gap with a lower floor)
3. T-profile (expansion profile).

Dimensions profile:

2150 x 47 x 11 mm (85 x 1 27/32 x 7/16 inch)



1. End profile



2. Reducer profile



3. T-profile

Aluminium profiles (intensive use)

2 profiles

Par-ky has developed aluminium profiles for each oak reference. These profiles are much stronger than the wooden variant and are therefore recommended for intensive use.

Dimensions profile:

- Connecting profile 900 x 38 mm (35 x 1 1/2 inch)
- End profile 2700 x 30 mm (106 x 1 3/16 inch)



Connecting profile



End profile

Keep your floor in good condition

To clean your Par-ky floor without damaging the lacquer, we recommend that you use our Par-ky cleaner. This was specially developed to remove dirt while protecting the wood.



Wood Floor Cleaner

1000 ml


The cleaner must be diluted with water. Clean using a damp cloth.



Ready to use Wood Floor Cleaner

500 ml spray

Handy to use, you can apply this directly onto the floor or the swiffer.

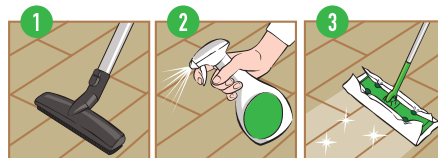

Repair pens

Small scratches can easily be repaired



Par-ky has developed "repair pens" for each floor. These make it easy for you to repair minor scratches on your floor. Boxes are available with 1 or 2 pens, depending on the shade of your Par-ky floor. After the repair, dirt can no longer get into the scratch.

The instructions for use are available at www.par-ky.com/en/Downloads.

Repair wax

A small hole, quickly fixed

Par-ky has also developed a repair wax for deeper holes. This allows holes that extend through the varnish to be repaired, thereby protecting the floor against the ingress of damp.

The repair wax kit contains 7 wax blocks, a melting knife and a spatula. The instructions can be found on the packaging or at www.par-ky.com/en/Downloads.



More extensive damage, no disaster

In case of larger damage, you can also easily replace a floorboard in the middle of the floor with the Par-ky bulldog thanks to the Uniclic® joining system. **Consult your dealer.**


Instructions and a handy film clip can be found at www.par-ky.com/en/Downloads.



Tips

Is Par-ky suitable for underfloor heating ?

Yes, Par-ky can easily be installed on top of underfloor heating. Because there are various different types of underfloor heating systems, we recommend following the manufacturer's instructions. As a general rule, the underfloor heating should not exceed 27°. Further info can also be obtained from your official Par-ky distributor. Installation tips can be found at www.par-ky.com/en/downloads.

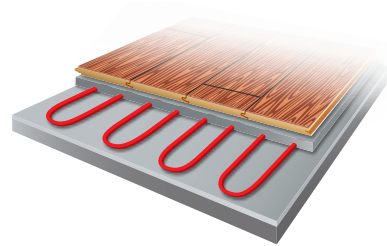

My floor has discoloured. Is that normal ?

Yes, Par-ky is real wood. Real wood deepens in colour under the influence of sunlight, this is a natural process.




Can Par-ky be sanded ?

No, the advantage is that sanding is no longer necessary. Sanding a floor takes a great deal of time and money and creates a lot of dust. Thanks to the DSI varnish system and the strong HDF board, it is incredibly difficult to make holes in a Par-ky floor. If holes are made, these cannot exceed 0.6 mm. What's more, Par-ky has developed repair pens and repair wax for the easy repair of scratches and small holes. In case of larger damage, you can also easily replace a floorboard in the middle of the floor with the bulldog thanks to the Uniclic joining system. So there is absolutely no need to sand the entire floor!






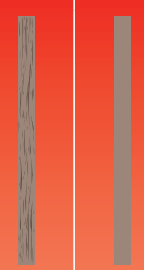






How do I avoid scratches ?

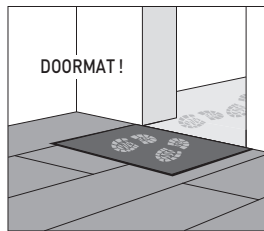Like any wooden floor, Par-ky is also liable to suffer small scratches. To avoid this: keep the floor clean, lay a doormat at the entrance to the room, place felt pads under furniture legs and place a protective mat under chairs with wheels.



Avoid use in damp rooms !

Par-ky is finished with a wooden top layer and is therefore not suitable for damp rooms such as bathrooms.

		twist ⁺		deluxe ⁺			sound ⁺		loung		pro	
		brushed	sealed	brushed	rough cut	sealed	brushed	sealed	brushed	sealed	brushed	sealed
	FLOOR BOARD											
		L R		L R			L R		L R		L R	
	BOX	Dimensions	868 x 124 mm (34 x 4 7/8 inch)	1800 x 160 mm (71 x 6 19/64 inch)			1800 x 124 mm (71 x 4 7/8 inch)		1203 x 124 mm (47 3/8 x 4 7/8 inch)		1203 x 190 mm (47 3/8 x 7 31/64 inch)	
		Thickness	12 mm (15/32 inch)	15 mm (19/32 inch)			12 mm (15/32 inch)		8,3 mm (21/64 inch)		7,2 mm (9/32 inch)	
		# Boards	9 boards	6 boards			9 boards		11 boards		11 boards	
	PALLET	Surface	0,969 m ² (10,43 sq.ft)	1,728 m ² (18,60 sq.ft)			2,009 m ² (21,62 sq.ft)		1,641 m ² (17,66 sq.ft)		2,514 m ² (27,06 sq.ft)	
		Gross weight	8,75 kg (19,29 lbs)	20,10 kg (44,31 lbs)			18,20 kg (40,12 lbs)		11,75 kg (25,90 lbs)		16,30 kg (35,94 lbs)	
		Dimensions	90 x 115 x 109 cm (35 x 45 x 43 inch)	180 x 115 x 112 cm (71 x 45 x 44 inch)			180 x 115 x 111 cm (71 x 45 x 44 inch)		124 x 101 x 115 cm (49 x 40 x 45 inch)		124 x 105 x 118 cm (49 x 41 x 46 inch)	
	FINISH	# Boxes	72 boxes	66 boxes			72 boxes		77 boxes		65 boxes	
		Surface	69,77 m ² (751 sq.ft)	114,05 m ² (1227,62 sq.ft)			144,65 m ² (1557 sq.ft)		126,36 m ² (1360,13 sq.ft)		163,41 m ² (1758,93 sq.ft)	
		Gross weight	640 kg (1410,96 lbs)	1348,6 kg (2973,15 lbs)			1332,4 kg (2937,44 lbs)		918,75 kg (2025,50 lbs)		1073,5 kg (2366,66 lbs)	
	BEVEL	Maxi ±1,5 mm (1/16 inch)	-	-	2	2	2	-	-	-	-	-
		Mini ±0,5 mm (1/64 inch)	4	4	2	2	2	4	4	4	2	4
		Micro ±0,1 mm (1/256 inch)	-	-	-	-	-	-	-	-	-	2
	GLOSS	Matt (10)	Satin (20)	Matt (10)	Matt (10)	Satin (20)	Matt (10)	Satin (20)	Matt (10)	Satin (20)	Matt (10)	Satin (20)
STRUCTURE		Brushed	Sealed	Brushed	Brushed + Rough cut	Sealed	Brushed	Sealed	Brushed	Sealed	Brushed	Sealed
BACKING		Real Wood + Cork		Real Wood + Cork			Real Wood + Cork		Real Wood		Real Wood	

TRENDY OAKS

EUROPEAN OAK	TB+101		DB+101			SB+101		LB101		PB101	
IVORY OAK	TB+102		DB+102			SB+102		LB102		PB102	
COTTAGE OAK <small>NEW</small>			DB+119			SB+119		LB119		PB119	
MILK OAK			DB+103			SB+103		LB103		PB103	
DESERT OAK	TB+104		DB+104			SB+104		LB104		PB104	
CLAY OAK <small>NEW</small>			DB+120			SB+120		LB120		PB120	
MYSTERY OAK			DB+105			SB+105		LB105		PB105	
ANTIQUE OAK	TB+106		DB+106	DR+106		SB+106		LB106		PB106	
CHOCOLATE OAK			DB+108			SB+108		LB108		PB108	
RUSTIC MANHATTAN OAK			DB+109			SB+109		LB109		PB109	
RUSTIC DESERT OAK <small>NEW</small>			DB+116			SB+116		LB116		PB116	
RUSTIC IVORY OAK			DB+110	DR+110		SB+110		LB110		PB110	

CONTEMPORARY CLASSICS

SAND ASH			DB+201			SB+201		LB201			
GOLDEN ASH						SB+202		LB202			
SMOKED WALNUT		TS+203			DS+203		SS+203		LS203		PS203
COFFEE BEECH							SS+204		LS204		

EXQUISITE EXOTICS

WENGÉ						SB+301		LB301			
AFZELIA DOUSSIÉ						SB+302		LB302			
SUCUPIRA					DS+303		SS+303		LS303		
TEAK							SS+304		LS304		PS304
SHADOW MACASSAR							SS+305		LS305		
ROSEWOOD SANTOS							SS+306		LS306		
BAMBOO STEAMED							SS+307		LS307		
JATоба							SS+308		LS308		
IMBUIA							SS+309				
INDIAN APPLE							SS+311				

		twist ⁺	
		brushed	sealed
GENERAL PROPERTIES	Wood veneer floor covering	EN14354	
	Domestic usage classification	EN685	
	Commercial usage classification	EN685	
	Warranty	DECOSPAN nv	
	CE certification	EN14342	
	Dop Nr.	14003	
	Moisture content	EN322	
	Dimensions of floor boards	EN14354	
	Thickness of the top layer	EN14354	
	Deviation of thickness	EN14354	
	Deviation of squareness	EN324-2	
	Cup in width direction	EN14354	
	Flatness deviation		
	Internal bond	EN319	
	Veneer glueing adhesion	EN204/205	
	Mechanical connection system		
	Opening between elements	EN14354	
	Tensile strength on short end	ISO24334	
	Density	EN323/EN672	
	Weight/sqm		
	Thickness distention	EN 13329 annex G	
	Resistance to indentation	EN 1534	
	Resistance to abrasion	EN 14354//EN112,73.XX	
	Impact resistance	EN 438-2,21EC2	
	Adhesion of the lacquer	EN ISO 2409	
	Resistance to chemical agents	EN 423/part 2	
ADDITIONAL PROPERTIES	Appearance of the lacquer	EN 438/2-5	
	Gloss	EN 2813	
	Hardness of the lacquer	DIN 53154	
	Residual indentation	EN 433	
	Impact resistance acc. to Wegner	EN 438-2/11	
	Elasticity of the lacquer	CEN/TC112 (Brinell)	
	Colour fastness	EN 105-B02	
	Castor chair resistance	EN 425	
	Burning cigarette	EN 438-2,18	
	Underfloor heating/cooling		
	Thermal resistance	EN 12667	
	Thermal conduction	EN 12667	
	Step sound	NF S 31-074	
	Acoustic improvement	EN 140-8/EN717-2(Ln,w)	
	Reduction of sound impact	EN 140-8/EN717-2 (ΔLw)	
	Antistatic performance	EN 1815	
	Biological durability	EN 335-1/EN335-2	
	Well-managed forests		
	Resistance to termites		
	Resistance to bacteria		
	Recycling		
	VOC loss	EN 664	
	VOC loss	French legislation ISO16000	
	Formaldehyde emission	E1 (EN 717-1)	
	Formaldehyde emission	E1 (EN 717-2)	
	Formaldehyde emission	ASTM E 1333-96	
SAFETY PROPERTIES	Exudation of plasticizers	EN 665	
	PCP (pentachlorophenol)	CEN/TR 14823	
	Burning cigarette	EN 438-2,18	
	Fire reaction and smoke generation	EN 13501-1	
	Slip resistance (dry conditions)	DIN 51131	
	Slip resistance (wet conditions)	EN 1339 (pendule)	

deluxe⁺

brushed | sealed

Class 23	
Class 31	
12 years	15 years
EN14342:2013 + A1	
14004	
≤6 %	
1800 x 160 x 15 mm	
0,6 mm	
≤0,5 mm	
≤0,2 mm	
≤0,2 %	
3 %	
>1,3 N/mm ²	
≥1 N/mm ²	
Uniclic system	
≤0,2 mm	
625 kg/lm	
>850 kg/m ³	
12 kg	
≤10 %	
≥20 Newton/mm ²	≥30 Newton/mm ²
>3000 revolutions	>5000 revolutions
>1200 (EC2)	
class <2	
grade 4*	
ok	
10% (matt)	20% (satin)
3 Newton	
<0,05 mm	
>5 Newton	>8 Newton
2 Hb	
grade >6	
no visible change	
Class 3**	
ok	
0,0997 m ² K/W	
0,100 W/mK	
classe D (85 db)	
60 dB	
16 dB	
< 2 kV (antistatic)	
pure wood	
FSC certified (optional)	
good	
Ultrafresh	
ok	
<2,1 %	
A+	
Class E1 (<0,13 ppm)	
Class E1 (<3,5 mg/m ³ h)	
CARB 2	
0 %	
PCP free	
Class 3**	
Class Cfl s1	
Class R11 (average)	
Class ≥15 (USRV)	

sound⁺

brushed | sealed

Class 23	
Class 31	
12 years	15 years
EN14342:2013 + A1	
14003	
≤6 %	
1800 x 124 x 12 mm	
0,6 mm	
≤0,5 mm	
≤0,2 mm	
≤0,2 %	
3 %	
>1,3 N/mm ²	
≥1 N/mm ²	
Uniclic system	
≤0,2 mm	
600 kg/lm	
>950 kg/m ³	
10 kg	
≤10 %	
≥20 Newton/mm ²	≥30 Newton/mm ²
>3000 revolutions	>5000 revolutions
>1200 (EC2)	
class <2	
grade 4*	
ok	
10% (matt)	20% (satin)
3 Newton	
<0,05 mm	
>5 Newton	>8 Newton
2 Hb	
grade >6	
no visible change	
Class 3**	
ok	
0,0820 m ² K/W	
0,122 W/mK	
classe D (85 db)	
64 dB	
15 dB	
< 2 kV (antistatic)	
pure wood	
FSC certified (optional)	
good	
Ultrafresh	
ok	
<2,1 %	
A	
Class E1 (<0,13 ppm)	
Class E1 (<3,5 mg/m ³ h)	
CARB 2	
0 %	
PCP free	
Class 3**	
Class Cfl s1	
Class R11 (average)	
Class ≥15 (USRV)	

lounge

brushed | sealed

Class 23	
Class 31	
12 years	15 years
EN14342:2013 + A1	
14002	
≤6 %	
1203 x 124 x 8,3 mm	
0,6 mm	
≤0,5 mm	
≤0,2 mm	
≤0,2 %	
4 %	
>1,4 N/mm ²	
≥1 N/mm ²	
Uniclic system	
≤0,2 mm	
550 kg/lm	
>950 kg/m ³	
8 kg	
≤8 %	
≥20 Newton/mm ²	≥30 Newton/mm ²
>3000 revolutions	>5000 revolutions
>1200 (EC2)	
class <2	
grade 4*	
ok	
10% (matt)	20% (satin)
3 Newton	
<0,05 mm	
>5 Newton	>8 Newton
2 Hb	
grade >6	
no visible change	
Class 3**	
ok	
0,0493 m ² K/W	
0,203 W/mK	
classe D (85 db)	
65 dB	
15 dB	
< 2 kV (antistatic)	
pure wood	
FSC certified (optional)	
good	
Ultrafresh	
ok	
<2,1 %	
A	
Class E1 (<0,13 ppm)	
Class E1 (<3,5 mg/m ³ h)	
CARB 2	
0 %	
PCP free	
Class 3**	
Class Bfl s1	
Class R11 (average)	
Class ≥15 (USRV)	

pro

brushed | sealed

Class 23	
Class 31	
12 years	15 years
EN14342:2013 + A1	
14001	
≤6 %	
1203 x 190 x 7,2 mm	
0,6 mm	
≤0,5 mm	
≤0,2 mm	
≤0,2 %	
4 %	
>1,4 N/mm ²	
≥1 N/mm ²	
Uniclic system	
≤0,2 mm	
500 kg/lm	
>950 kg/m ³	
7 kg	
≤8 %	
≥20 Newton/mm ²	≥30 Newton/mm ²
>3000 revolutions	>5000 revolutions
>1200 (EC2)	
class <2	
grade 4*	
ok	
10% (matt)	20% (satin)
3 Newton	
<0,05 mm	
>5 Newton	>8 Newton
2 Hb	
grade >6	
no visible change	
Class 3**	
ok	
0,043 m ² K/W	
0,230 W/mK	
classe D (85 db)	
65 dB	
15 dB	
< 2 kV (antistatic)	
pure wood	
FSC certified (optional)	
good	
Ultrafresh	
ok	
<2,1 %	
A	
Class E1 (<0,13 ppm)	
Class E1 (<3,5 mg/m ³ h)	
CARB 2	
0 %	
PCP free	
Class 3**	
Class Cfl s1	
Class R11 (average)	
Class ≥15 (USRV)	

Need advice?

We'll be happy to help you with your choice !

Would you like to see the quality of Par-ky with your own eyes and feel the natural warmth of the wood? Are you unable to choose between the different varieties of wood and colours? Then we'll happily help you with your choice! Our distributors have all the necessary knowledge and their stores are equipped with a display containing up-to-date samples. This will make choosing your dream floor quick and easy. **You can find your nearest store at www.par-ky.com/en/Dealers or by scanning the code with your smartphone.**



Par-ky®
friendly floors

Decospan nv
Industriezone Grensland
Lageweg 33
8930 Menen - Belgium
tel +32 56 52 88 49
info@par-ky.com

www.par-ky.com

Par-ky® is a product of  Decospan®.
The photos of the different wood species, as shown in this brochure,
are a representation of a unique part of wood and are not binding for future deliveries.

